

# Harmsco® Hurricane® Filters With ASME “U” Stamp Certification

Filters meet ASME design requirements for high pressure applications and when insurance compliance is required. Rugged, heavy-duty construction for long equipment life and durability.

**Quantity Discounts Available. Call for quote and delivery schedule.**

**Specifications:**

Material: 304 stainless steel  
 Closure: Hinged lids with swing-bolts  
 (Spring assist on Model HUR 850ASME)  
 Pressure: Rated to 200 psi (13.3 bar) @ 100°F  
 Temperature: Cartridges rated to 140°F (60°C)

Filter Model	Cartridge	Max. Flow Rate	Inlet/Outlet	Height	Ship Wt.
HUR 90 ASME	Model 90 (1)	Up to 100 GPM	2"	36"	225 lbs.
HUR 170 ASME	Model 170 (1)	Up to 150 GPM	2"	48"	250 lbs.
HUR 850 ASME	Model 170 (5)	Up to 600 GPM	4" *	66"	900 lbs.

\*Flanged




Models HUR 170 ASME, HUR 850 ASME and HUR 90 ASME

## Harmsco® Hurricane® and WaterBetter® High Temperature Replacement Cartridges

**For Housings listed on pages 17, 18, 19**

Cleanable and reusable in most applications.  
 Rated for Temperatures to 250°F (121°C)  
 and Pressures of 50 PSID.

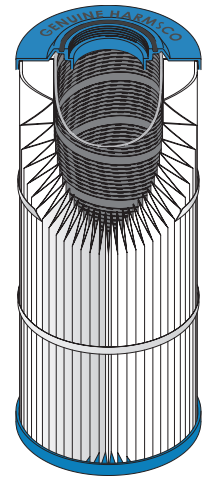

High Temperature Replacement Cartridge

Product Code	Micron	No./case	Ship Wt. (lbs.)	Carton Size (in.)
HC/40-20HT	20	1	4	9 x 9 x 11
HC/40-50HT	50	1	4	9 x 9 x 11
HC/90-5CPHT	5	1	7	9 x 9 x 21
HC/90-10HT	10	1	7	9 x 9 x 21
HC/90-20HT	20	1	7	9 x 9 x 21
HC/90-50HT	50	1	7	9 x 9 x 21
HC/170-5HT	5	1	10	9 x 9 x 32
HC/170-5CPHT	5	1	10	9 x 9 x 32
HC/170-10HT	10	1	10	9 x 9 x 32
HC/170-20HT	20	1	10	9 x 9 x 32
HC/170-50HT	50	1	10	9 x 9 x 32

## 316 Stainless Steel Single Cartridge Filter Housings

**FDA Compliant**



A series of rugged, heavy-duty stainless steel filter cartridge housings suitable for high-flow, high-capacity, and/or high temperature applications. Accept 10" and 20" length nominally sized cartridges.

Sumps have a spring-loaded seal plate to accept cartridges of varying length. This design also allows easier assembly of sump into head by raising the cartridge an inch for easy mating with centering post.

All models feature stainless steel sump and head. Includes 1/4" NPT drain.

**Operating pressure range:**  
 300 psi (20.7 bar) maximum  
**Operating temperature:**  
 40-300° F (4-149° C)

**Dimensions (approx.):**  
 4-1/8" OD x 15-5/8" length (10" models)  
 4-1/8" OD x 25-3/8" length (20" models)

Product Code	Type	Pipe	Case	Wt. (lbs.)	Carton Size (in.)
FSSS-1A	10"	3/4"	6	9	4-1/2x4-1/2x14
FSSS-2A	20"	3/4"	6	11	4-1/2x4-1/2x24